





JOST JSK37 Fifth Wheel

The “industry standard” available in a wide range of configurations

- » Available in cushion and pin type foot mounting
- » Standard versions or eco-friendly greaseless top plate
- » Positive locking mechanism with visual safety latch
- » Volume loading and road train rated at 190 kN
- » Option available of extended handle and latch cord for ease of operation
- » Various mounting heights available:
 - » Pin type model 130 mm up to 255 mm
 - » Cushion type model 150 mm up to 300 mm
- » Bolt on/weld on pedestals
- » Sensor unit available for the JSK 37 CZ and JSK 37 CW models
- » Lubetronic unit supplied as standard for JSK 37 CW and JSK 37 EW models at no extra cost

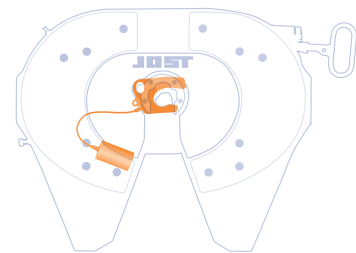

*JSK 37 CW/EW
with Lubetronic*

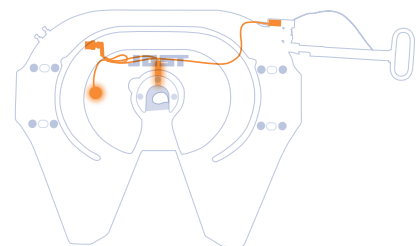

*JSK 37 CZS/CWS
Sensor Coupling*

Technical Data

Type	JSK 37C
King Pin	2" / 50mm
Imposed Load	20,000kg
D-Value	190kN
CRN	41876