


JSK54 – Heavy Duty Fifth Wheel Coupling 4" for extreme applications

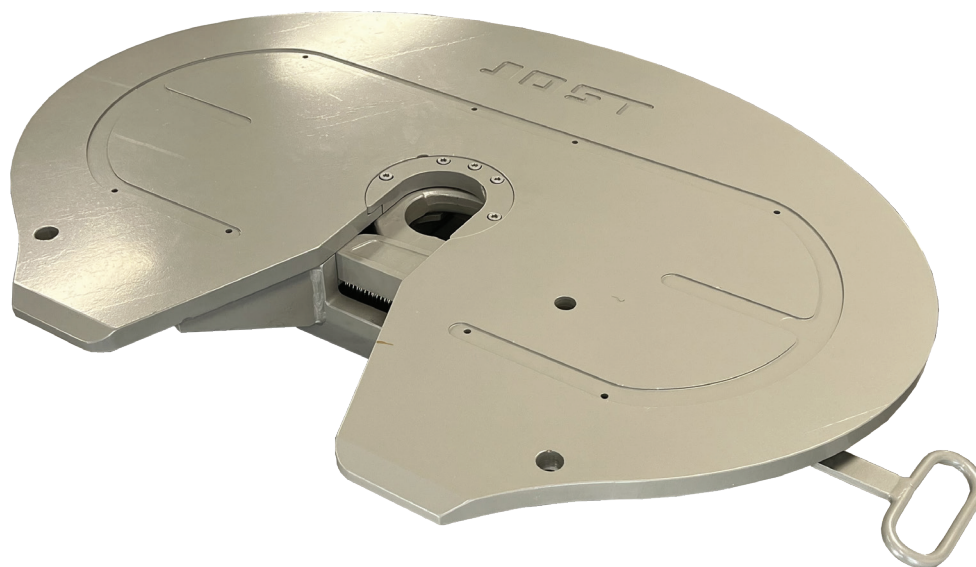

Extreme heavy duty fifth wheel coupling for use in offroad applications.

4" fifth wheel.



Compatible with 4" / 100mm king pins.

Imposed load 80t.


GCM rating 385T *combination specific.

Technical specification:

D-value	550 kN
Weight	490 kg

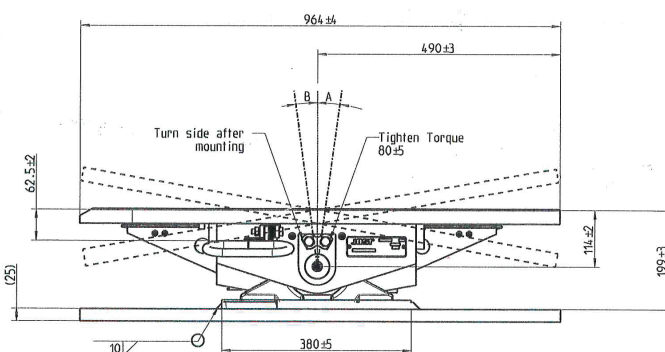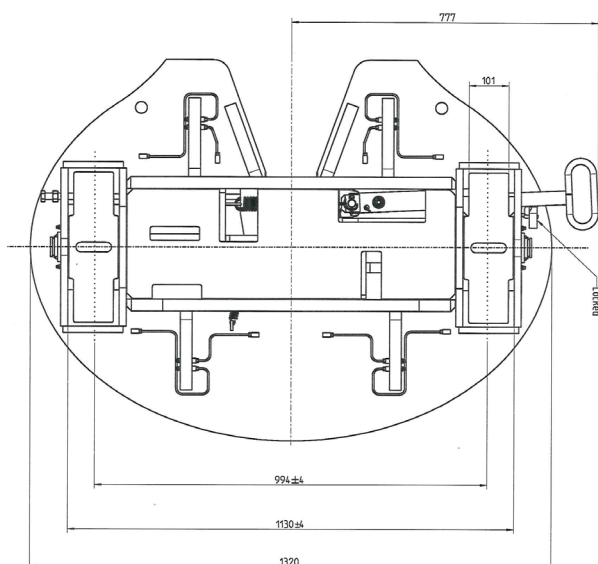

JSK54 Assembled View

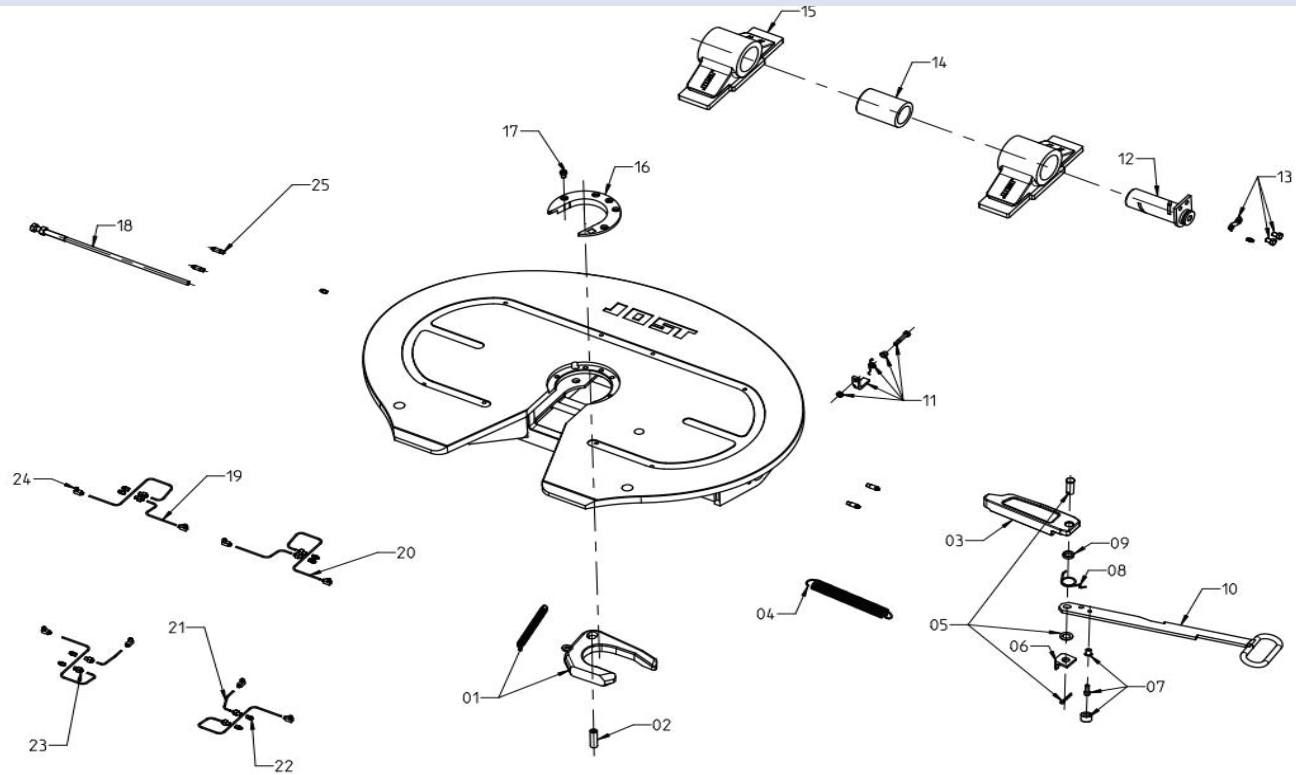

No.	Description	Remark	Order No.	Quantity /set
1	Lock jaw	4" (100)	SK8303-005	1
2	Pivot		SK8303-307	1
3	Lock bar		SK8303-209	1
4	Double tension spring		SK8301-210-01	1
5	Bar bolt		SK8301-006	1
6	Fixing loop		SK8101-206	1
7	Bolt		SK8301-007	1
8	Spring		SK2405-009	1
9	Washer		SK8101-305	1
10	Pull handle		SK8303-213	1
11	Latch mechanism		SK8301-008	1
12	Swivel pin with stop		SK8301-205	2
13	Hexagon head screw + retaining sheet		SK2921-038	2
14	Bushing		SK8301-204	2

No.	Description	Remark	Order No.	Quantity /set
15	Pedestal (196mm)		SK8301-224	2
16	Wearing ring	4" (100)	SK8303-223	1
17	Socket head cap screw		SK2421-008-02	5
18	Adjusting screw with hexagon nut		SK8301-301	1
19	Oil pipe 1		SK8301-220	2
20	Oil pipe 2		SK8301-221	4
21	Oil pipe 3		SK8301-222	2
22	Oil nipple		SK8301-308	10
23	Oil pipe joint		SK8301-310	8
24	90 oil pipe joint		SK8301-309	8
25	Oil nipple-long		SK8301-308-01	4